


DRAWING MADE IN THIRD ANGLE PROJECTION

MOD 40 LOC AJ DIST 16

REVISIONS					
P	Q	DESCRIPTION	DATE	APPROVED	
✓	D	REV & REDWN	C83-434	7-15-73	DS/SL
✓	E	ADD PIN 22000-1 PER AJ-3009		5/1/88	DS/KSN

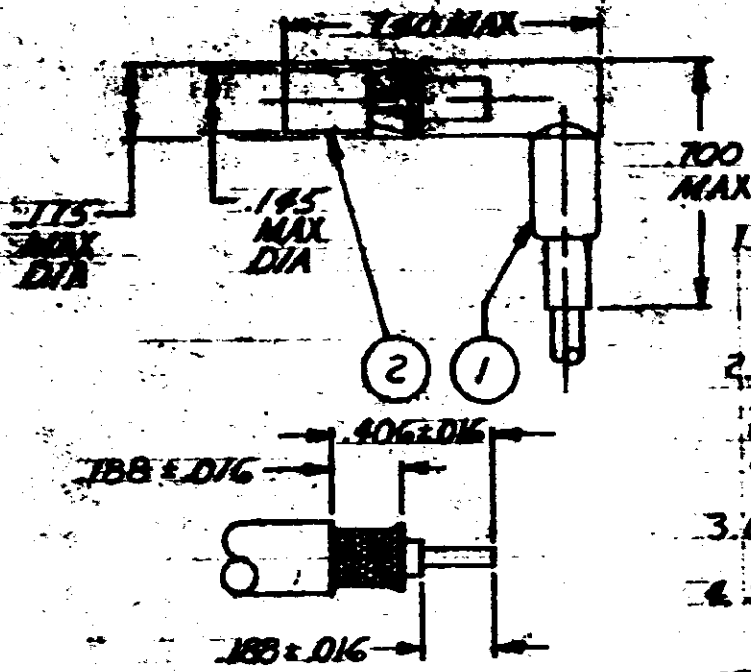

1. 180 MIN DIA HOLE REQ'D FOR CONTACT TO FEED THROUGH P.C. BOARD.

2. FOR USE WITH: RG-178/U DBL Braid, 176/U, MALCO * 250-3908-0000, & TEASOLITE * 30850/817-1.

3. CRIMPING TOOL: 220215-1.

4. SEE LS. 2923.

5. ITEM 3 IS USED TO STABILIZE CONTACT IN THE HOUSING CAVITY; OTHERWISE DISCARD.

RECOMMENDED STRIP LENGTH

ITEM	QTY	DESCRIPTION	PART NO
3	1	SPRING, ALIGNMENT	222000-1
2	1	SOCKET ASSY, RTANG	227626-1
1	1	FERRULE	222722-2

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MAY 15 1993
 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
 DECIMALS: * = .0005, ** = .0001
 ANGLES: ± = ±

MATERIAL _____
 FINISH _____

CONTRACT NO _____
 DR _____ 7-15-73
 CRK *D.S. Harde* 9/23/83
 APPD *T. Polan* 9-24-73
 APPD *R. P. K.../P...*
 DSGN APPD _____
 OTHER APPD *W. J. ...* 9/24/73

AMP | AMP INCORPORATED
 Harrisburg, Pa. 17105

NAME **CONNECTOR, COAXIAL, MULTIPLE, RF, CONTACT, SOCKET, RTANG, ...**

SIZE **A** | FSCM NO **00779** | DRAWING NO **227606-1**

SCALE **1:1** | SHEET _____