




.050" [1.27 mm] Contact Centers, IDC Sockets, .100" [2.54 mm] Row Spacing Insulation Displacement With or Without Strain Relief - SFH Series Mates with SBH41 series (See opposite page)

SPECIFICATIONS

- Centered Polarizing Key
- Operating Temperature: -40°C to +105°C
- UL Flammability Rating: 94V-0
- Contact Resistance: 30 Megohms Max.
- Current Rating: 1 Amp
- Dielectric Withstanding: 500 VAC
- Insulation Resistance: 1000 Megohms

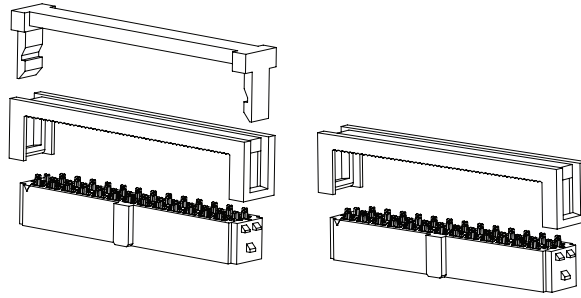

PART NUMBER OPTIONS

SFH41 - P P P B - D 10 - ID - BK

SERIES
 SFH41 = IDC Socket Without Strain Relief, .050" [1.27 mm] Contact Centers by .100" [2.54 mm] Row Spacing
 SFH413 = IDC Socket With Strain Relief, .050" [1.27 mm] Contact Centers by .100" [2.54 mm] Row Spacing

INSULATOR MATERIAL
 P = PBT

CONTACT MATERIAL
 P = Phosphor Bronze

CONTACT FINISH - RoHS Compliant
 P = Gold Flash Overall
 E = .000100" Pure Tin, Matte, Overall
 V = Gold Flash on Contact Surface, Nickel on Termination

COLOR
 BK = Black



TERMINATION TYPE
 ID = Insulation Displacement

NUMBER OF CONTACT POSITIONS
 05, 08, 10, 13, 15, 17, 20, 25, 30, 34, 40, 50

NUMBER OF ROWS
 D = Dual Row

CONTACT CENTERS
 B = .050" [1.27 mm]

DIMENSIONS For complete drawings, go to www.sullinscorp.com or e-mail techsupport@sullinscorp.com Dimensions in [] are in millimeters, all others are in inches.

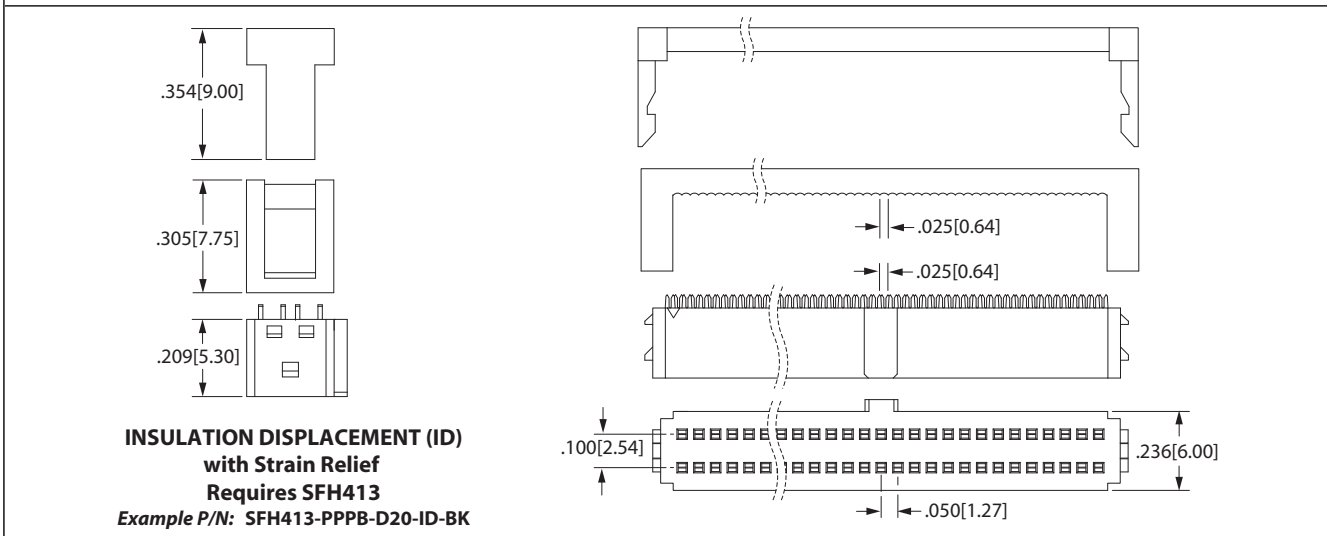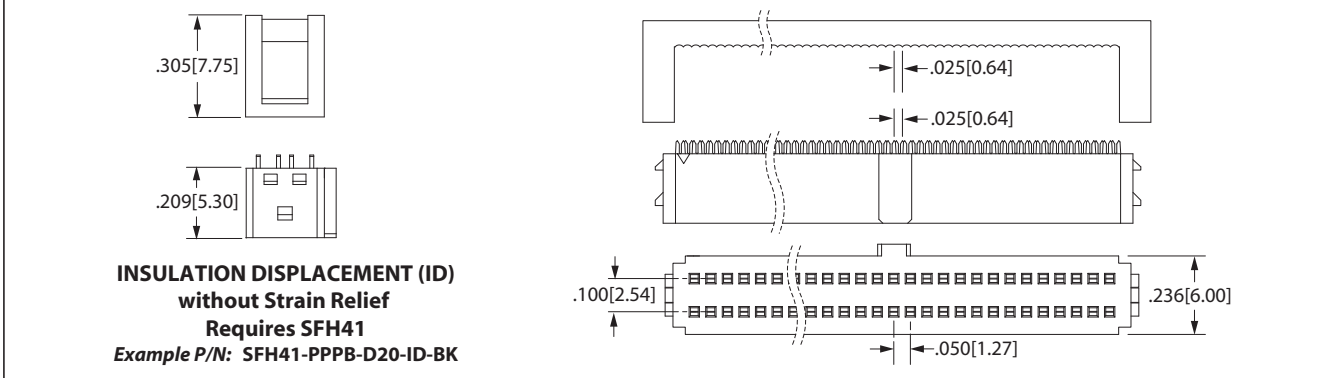

Headers